


SPIROL®

WHITE PAPER

Features and Benefits of ArmorGalv® Thermal Zinc Diffusion

by Michael J. Pasko, Applications Engineer
SPIROL International Corporation

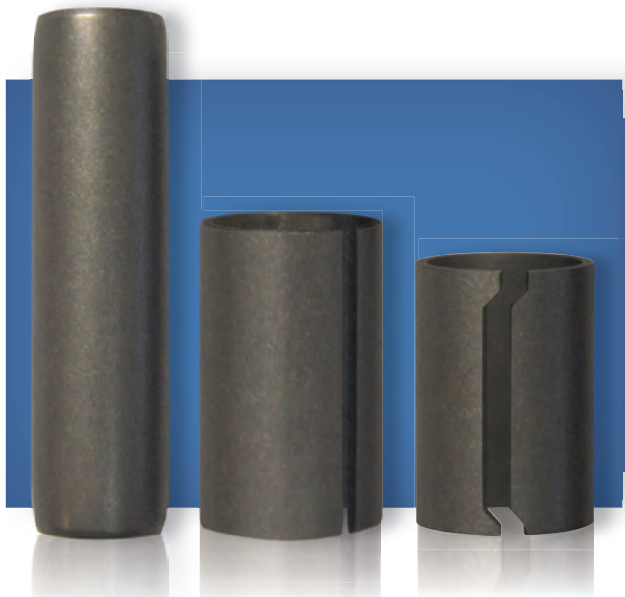

ArmorGalv® Thermal Diffusion

1,000+ HOURS

corrosion resistance

Thermal Diffused Zinc, a finishing process historically known as Sherardizing, has been used for corrosion protection of metal parts for over a century. Over the years, improvements have been made to the Sherardizing zinc/iron diffusion process. The modern, greatly improved process, known as **ArmorGalv®** is now being introduced as a standard finish for **SPIROL** products, and is poised to revolutionize the market. ArmorGalv® is anodic to steel and as such, provides long term sacrificial galvanic protection. Unlike traditional electroplating there is no risk of hydrogen embrittlement, adhesion is superior, coating thickness uniform, and all surfaces are covered. **There are no insignificant surfaces.** The affordability, durability, and low environmental impact of ArmorGalv® makes it ideal for today's market.


ArmorGalv® is a zinc alloy thermal diffusion coating, and is covered by ASTM A1059M-08(2013). This process requires a closed container, heated to a minimum 343°C (650°F), with a powdered zinc mixture. At this temperature sublimation of the zinc mixture occurs and it is dispersed into the container as a vapor. Being soluble in iron, the zinc vapor subsequently diffuses into the surface of ferrous parts. Volume of the zinc mixture is calculated based upon total surface area of the parts resulting in excellent control of resultant thickness with near total consumption of the zinc powder. After the diffusion, specially designed topcoats and sealers are applied to complete the finish. The United States Environmental Protection Agency has stated this finish approaches zero emissions and it has received recognition and awards for its contribution to pollution prevention. There is no hazardous chemistry and water consumption is extremely low. In addition to these benefits, ArmorGalv® exceeds the performance benchmarks of many competing solutions.

SPIROL recommends ArmorGalv® coating as an alternative to traditional platings and coatings for many reasons; chief among them product quality, maximum corrosion protection/performance, cost effectiveness, and environmental stewardship. Primary benefits of ArmorGalv® are:

	1,000 hours or greater corrosion resistance of time to red rust (base metal attack)
	ZERO risk of hydrogen embrittlement
	Will not reduce fatigue strength of material (applicable to all alloys including stainless)
	Uniform deposition of coating on all surfaces (No insignificant surfaces). All internal features or ØID's receive full coating and protection
	Cost effective
	Anti-galling characteristics similar to cadmium (may be applied to stainless steel)
	No flaking, peeling, or blistering – approximately 1/3 of finish thickness is diffused into the coated surface effectively becoming part of the component
	Hard and highly abrasion resistant @ 37-42 HRC
	Slightly porous surface will retain paint and other coatings in the event complete pinned assembly requires subsequent painting, powder coating, etc.


ArmorGalv® offers a low risk, cost effective, high performance alternative to many of today's platings and coatings. With ever-increasing performance and life cycle requirements, this coating is an ideal solution for fasteners used in some of the most aggressive environments such as marine, automotive, mining, and industrial manufacturing. The following photographs provide visual representation of this coatings effectiveness.

Uniformity of deposition is visible in the following photographs. Note coverage of all surfaces including peaks, valleys, corners, and gaps:

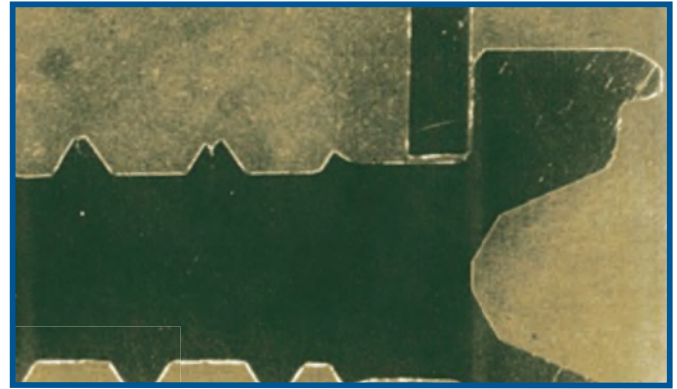

Fastener and washer with ArmorGalv® coating.


The image below demonstrates the layered structure of ArmorGalv®. Maximum percentages of zinc occur at the surface with the percent iron increasing with depth (20 microns average coating thickness is applied to SPIROL fasteners):

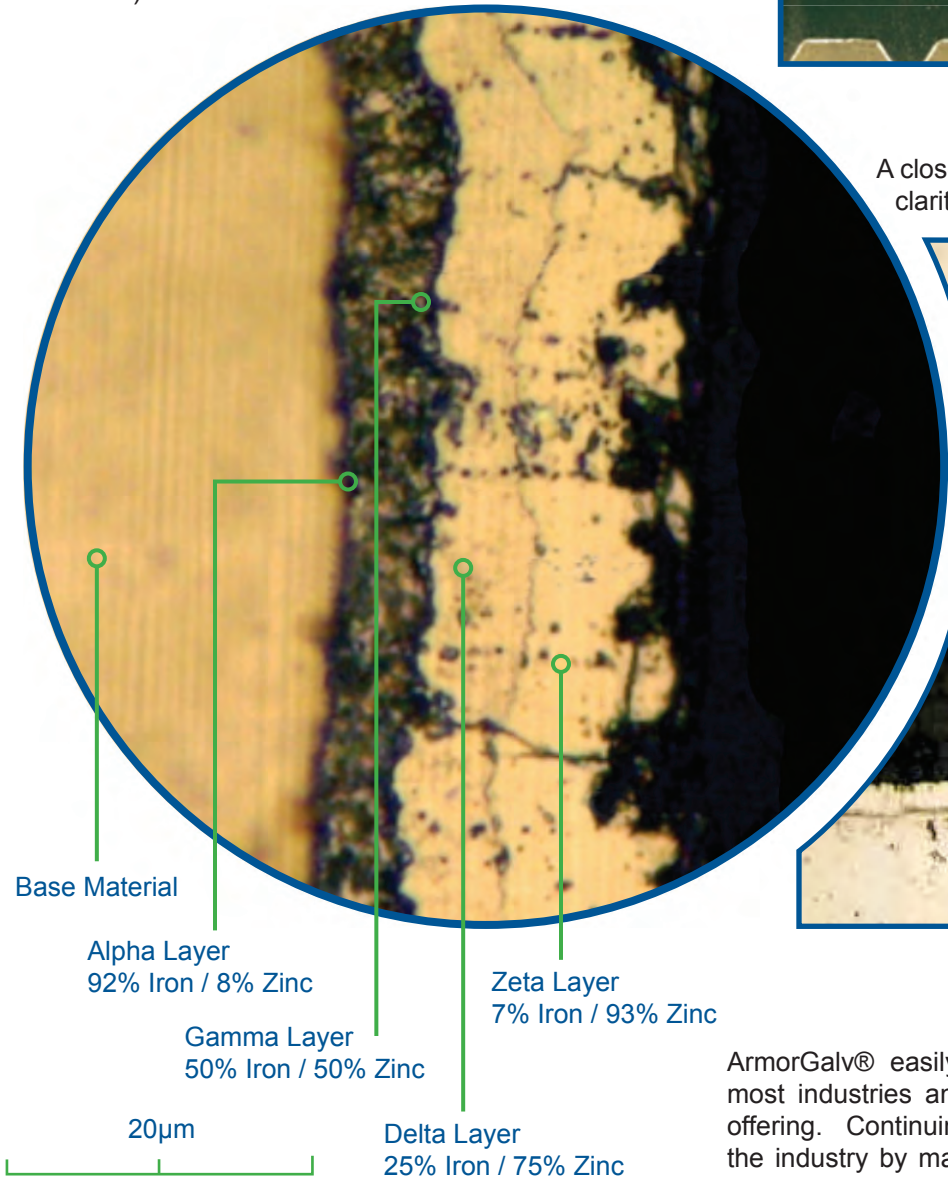

A closer cross-section with thicker deposition for clarity in the two images below:



Powder Metal Parts Before ArmorGalv®

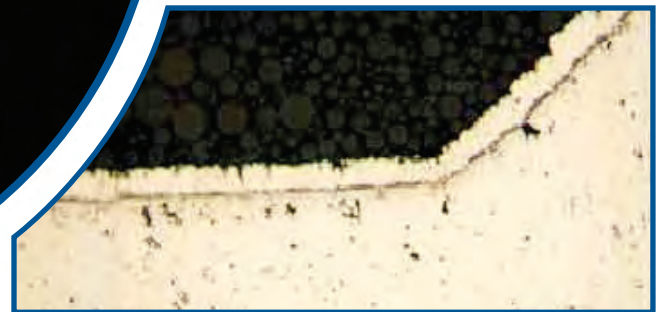

Powder Metal Parts After ArmorGalv®
(100 microns / 4mils)

ArmorGalv® easily exceeds the corrosion requirements of most industries and is ideally suited for SPIROL's product offering. Continuing their 68+ year tradition of innovation in the industry by making the investment in the equipment and tailoring the process to meet the specific needs of their product lines, SPIROL is able to offer this superior coating as an in-house process at a cost-effective price. As stated by SPIROL's Marketing Manager, Christie Jones, "SPIROL is proud to be a part of the ArmorGalv® family. This is most definitely a game-changer for the fastener industry!"

Contact SPIROL today for more information about ArmorGalv®!

**ArmorGalv is
RoHS and REACH
compliant.**

SPIROL® Innovative fastening solutions. Lower assembly costs.



Technical Centers

Americas

SPIROL International Corporation
30 Rock Avenue
Danielson, Connecticut 06239 U.S.A.
Tel. +1 860 774 8571
Fax. +1 860 774 2048

SPIROL Shim Division
321 Remington Road
Stow, Ohio 44224 U.S.A.
Tel. +1 330 920 3655
Fax. +1 330 920 3659

SPIROL Canada
3103 St. Etienne Boulevard
Windsor, Ontario N8W 5B1 Canada
Tel. +1 519 974 3334
Fax. +1 519 974 6550

SPIROL Mexico
Avenida Avante #250
Parque Industrial Avante Apodaca
Apodaca, N.L. 66607 Mexico
Tel. +52 81 8385 4390
Fax. +52 81 8385 4391

SPIROL Brazil
Rua Mafalda Barnabé Soliane, 134
Comercial Vitória Martini, Distrito Industrial
CEP 13347-610, Indaiatuba, SP, Brazil
Tel. +55 19 3936 2701
Fax. +55 19 3936 7121

Europe

SPIROL France
Cité de l'Automobile ZAC Croix Blandin
18 Rue Léna Bernstein
51100 Reims, France
Tel. +33 3 26 36 31 42
Fax. +33 3 26 09 19 76

SPIROL United Kingdom
17 Princewood Road
Corby, Northants
NN17 4ET United Kingdom
Tel. +44 1536 444800
Fax. +44 1536 203415

SPIROL Germany
Ottostr. 4
80333 Munich, Germany
Tel. +49 89 4 111 905 71
Fax. +49 89 4 111 905 72

SPIROL Spain
08940 Cornellà de Llobregat
Barcelona, Spain
Tel. +34 93 193 05 32
Fax. +34 93 193 25 43

SPIROL Czech Republic
Sokola Tůmy 743/16
Ostrava-Mariánské Hory 70900
Czech Republic
Tel/Fax. +420 417 537 979

SPIROL Poland
ul. Solec 38 lok. 10
00-394, Warszawa, Poland
Tel. +48 71 399 44 55

Asia Pacific

SPIROL Asia Headquarters
1st Floor, Building 22, Plot D9, District D
No. 122 HeDan Road
Wai Gao Qiao Free Trade Zone
Shanghai, China 200131
Tel. +86 21 5046 1451
Fax. +86 21 5046 1540

SPIROL Korea
160-5 Seokchon-Dong
Songpa-gu, Seoul, 138-844, Korea
Tel. +86 (0) 21 5046-1451
Fax. +86 (0) 21 5046-1540

e-mail: info@spirol.com

SPIROL.com

Please refer to www.SPIROL.com for current specifications and standard product offerings.

SPIROL Application Engineers will review your application needs and work with you to recommend the optimum solution. One way to start the process is to visit our **Optimal Application Engineering** portal at **SPIROL.com**.

© 2017 SPIROL International Corporation
No part of this publication may be reproduced or transmitted in any form or by any means, electronically or mechanically, except as permitted by law, without written permission from SPIROL International Corporation.